PORT CAPITAL | POLYRIB PTY LTD

Updated dimension schedule

Supplier POR range | Existing website references: PCGT range

Latest supplier dimensions for the new grease trap range. Dimensions below are in millimetres. L is the table body length; allow separately for connections and installation access.

Supplier / website	L	W	H	Dry kg*	Inlet H1	Outlet H2
POR1000 / PCGT1000	1800	900	980	58	800	720
POR1500 / PCGT1500	2060	1000	1150	75	980	900
POR2000 / PCGT2000	2478	1200	1300	95	1100	1020
POR3000 / PCGT3000	2565	1300	1400	143	1180	1090
POR4000 / PCGT4000	2280	1620	1755	193	1500	1425
POR5000 / PCGT5000	2660	1620	1755	221	1500	1425

Reading the drawings

Plan-view lengths of 1,975 (POR1000), 2,195 (POR1500) and 2,557 (POR2000) and 2,655 (POR3000) are also shown across the end connections. These are separate from the body lengths above. Confirm the required installation envelope with Polyrib.

Document coverage

Supplier drawings: POR1000, POR1500, POR2000, POR3000 and POR4000. At Polyrib's direction, the POR5000 illustration uses the POR4000 drawing with length changed to 2660 mm. POR3000 also shows a 1350 mm secondary height and 2655 mm overall connection length. Drawing-to-model matching is based on the dimension schedule.

Specification support


Supplier labels are H1 (inlet) and H2 (outlet); confirm the measurement datum before setting pipe invert levels. *Dry weights are approximate values from the original product specifications, restored at Polyrib’s direction. Confirm access openings, loading, connections, working capacity and authority requirements before procurement.

PORT CAPITAL | POLYRIB PTY LTD

PCGT1000 / POR1000

Port Capital grease trap | Supplier dimension reference POR1000

Body L	Width	Height	Dry weight	Inlet H1	Outlet H2
1,800 mm	900 mm	980 mm	58 kg*	800 mm	720 mm

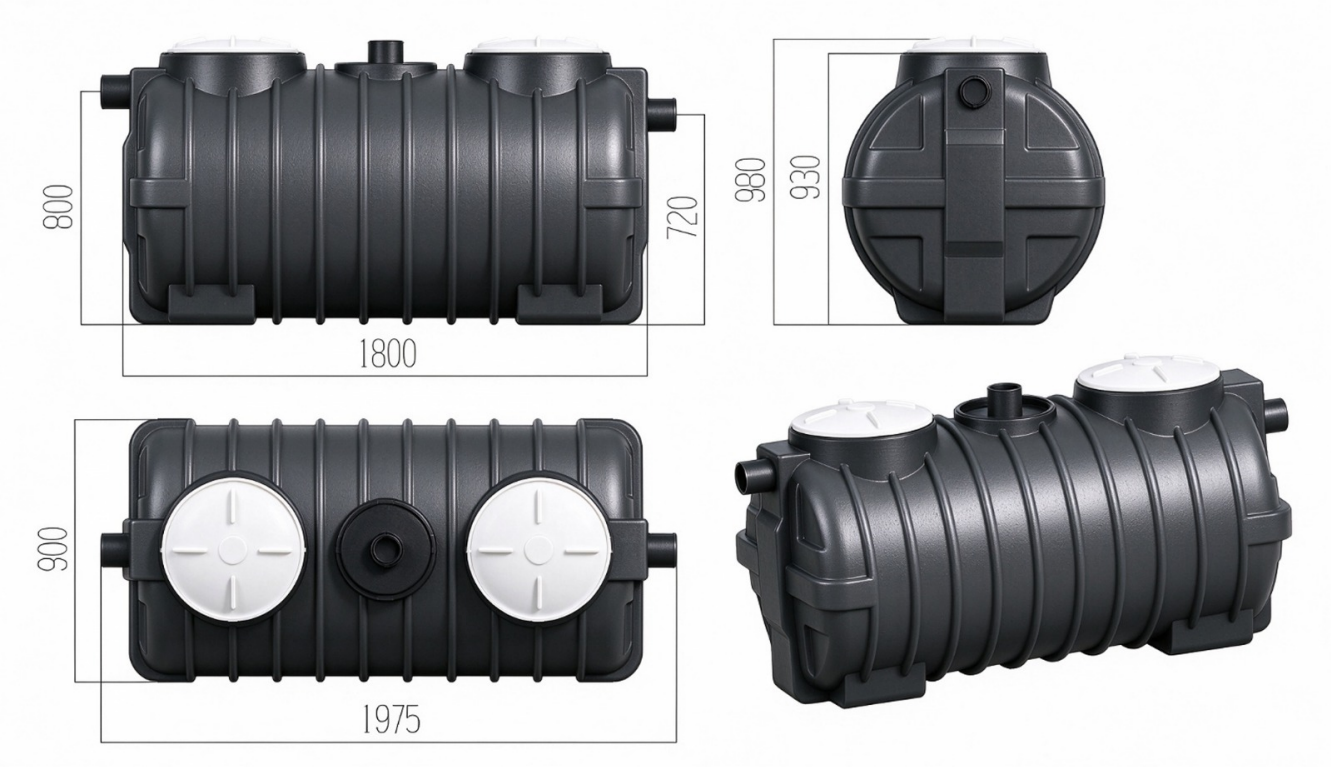

Supplier drawing as received. Model reference matched to the supplied dimension table. Do not scale the image.

Use the dimension schedule for body dimensions. H1/H2 are supplier-labelled inlet/outlet heights; confirm the datum for site set-out. *Approximate dry weight is retained from the original product specifications. Confirm opening sizes, pipe connections, lid loading and installation details for the supplied model.


The PCGT reference is retained from the existing Port Capital website. POR is the supplier schedule reference. Confirm the exact product supplied when ordering.

PORT CAPITAL | POLYRIB PTY LTD

PCGT1500 / POR1500

Port Capital grease trap | Supplier dimension reference POR1500

Body L	Width	Height	Dry weight	Inlet H1	Outlet H2
2,060 mm	1,000 mm	1,150 mm	75 kg*	980 mm	900 mm

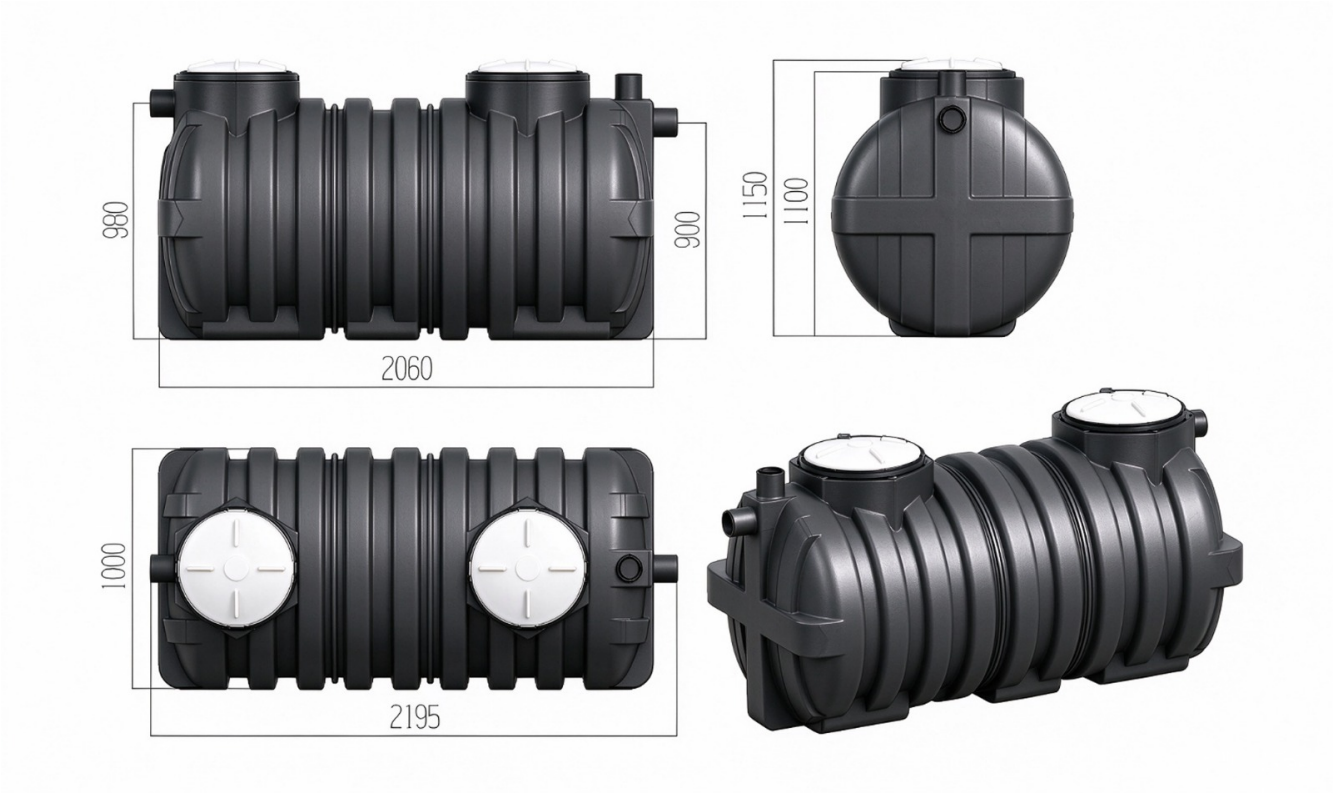

Supplier drawing as received. Model reference matched to the supplied dimension table. Do not scale the image.

Use the dimension schedule for body dimensions. H1/H2 are supplier-labelled inlet/outlet heights; confirm the datum for site set-out. *Approximate dry weight is retained from the original product specifications. Confirm opening sizes, pipe connections, lid loading and installation details for the supplied model.

The PCGT reference is retained from the existing Port Capital website. POR is the supplier schedule reference. Confirm the exact product supplied when ordering.

PORT CAPITAL | POLYRIB PTY LTD

PCGT2000 / POR2000

Port Capital grease trap | Supplier dimension reference POR2000

Body L	Width	Height	Dry weight	Inlet H1	Outlet H2
2,478 mm	1,200 mm	1,300 mm	95 kg*	1,100 mm	1,020 mm



Supplier drawing as received. Model reference matched to the supplied dimension table. Do not scale the image.

Use the dimension schedule for body dimensions. H1/H2 are supplier-labelled inlet/outlet heights; confirm the datum for site set-out. *Approximate dry weight is retained from the original product specifications. Confirm opening sizes, pipe connections, lid loading and installation details for the supplied model.


The PCGT reference is retained from the existing Port Capital website. POR is the supplier schedule reference. Confirm the exact product supplied when ordering.

PORT CAPITAL | POLYRIB PTY LTD

PCGT3000 / POR3000

Port Capital grease trap | Supplier dimension reference POR3000

Body L	Width	Height	Dry weight	Inlet H1	Outlet H2
2,565 mm	1,300 mm	1,400 mm	143 kg*	1,180 mm	1,090 mm

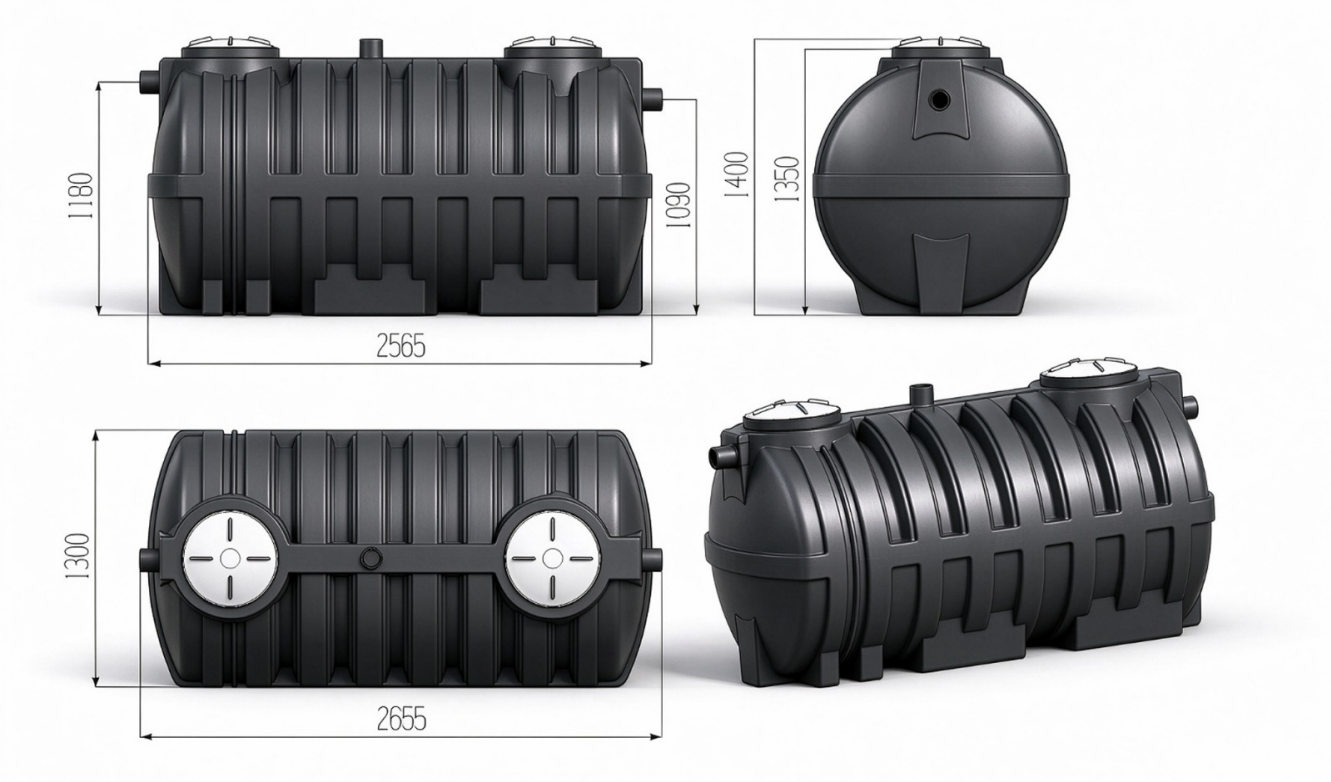

Supplied POR3000 model drawing. Body length 2565 mm; overall connection length 2655 mm; secondary height 1350 mm. Do not scale.

Use the dimension schedule for body dimensions. H1/H2 are supplier-labelled inlet/outlet heights; confirm the datum for site set-out. *Approximate dry weight is retained from the original product specifications. Confirm opening sizes, pipe connections, lid loading and installation details for the supplied model.

The PCGT reference is retained from the existing Port Capital website. POR is the supplier schedule reference. Confirm the exact product supplied when ordering.

PORT CAPITAL | POLYRIB PTY LTD

PCGT4000 / POR4000

Port Capital grease trap | Supplier dimension reference POR4000

Body L	Width	Height	Dry weight	Inlet H1	Outlet H2
2,280 mm	1,620 mm	1,755 mm	193 kg*	1,500 mm	1,425 mm



Supplier drawing as received. Model reference matched to the supplied dimension table. Do not scale the image.

Use the dimension schedule for body dimensions. H1/H2 are supplier-labelled inlet/outlet heights; confirm the datum for site set-out. *Approximate dry weight is retained from the original product specifications. Confirm opening sizes, pipe connections, lid loading and installation details for the supplied model.

The PCGT reference is retained from the existing Port Capital website. POR is the supplier schedule reference. Confirm the exact product supplied when ordering.

PORT CAPITAL | POLYRIB PTY LTD

PCGT5000 / POR5000

Port Capital grease trap | Supplier dimension reference POR5000

Body L	Width	Height	Dry weight	Inlet H1	Outlet H2
2,660 mm	1,620 mm	1,755 mm	221 kg*	1,500 mm	1,425 mm



POR5000 illustration adapted from the POR4000 drawing at Polyrib's direction; length label changed to 2660 mm. Other views and dimensions retained. Do not scale.

Use the dimension schedule for body dimensions. H1/H2 are supplier-labelled inlet/outlet heights; confirm the datum for site set-out. *Approximate dry weight is retained from the original product specifications. Confirm opening sizes, pipe connections, lid loading and installation details for the supplied model.

The PCGT reference is retained from the existing Port Capital website. POR is the supplier schedule reference. Confirm the exact product supplied when ordering.